



LEXAN AND SHEET METAL

cogan.com

Galvanized track and welded reinforcement tube (Track type varies based on gate size) EXAMPLE: LEXAN LENGTH Typical 6'W x 8'H bi-parting sliding gate shown here. Panel configuration and quantity will vary based on gate dimensions. SHEET METAL TYP. Assembly instructions are specific to the the hasp size and material of your gate. See Installation Receiving Manual for complete bracket ίο Galvanized floor guide

BI-PARTING SLIDING GATE

Description

Cogan bi-parting sliding gates are available in a similar range of convenient sizes as our sliding gates. Ideal for use in constricted areas. All bi-parting sliding gates are equipped with a padlock hasp. Additional lock options are also available. Doors are made of 3/16" thick clear Lexan and heavy-duty 16 GA corrugated steel framed in 1 1/4" x 1 1/4" x 12 GA structural angle.

PRODUCT INFORMATION

Specifications

Door Heights	7° to 9°
Type of Door	Bi-Parting Sliding Gate
Door Stop	Attached to the right door.
Finish	Powder-coated
Materials	16GA Corrugated Sheet Metal and Lexan
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA
Type of Closure	Padlock Hasp (Optional locks available)
Stiffening profile	None



ORIENTATION OF GATE OPENING




Cogan Grey

3/16" thick clear Lexan Lexan panels cannot be painted.



Please consult the table below for a complete list of dimensions.

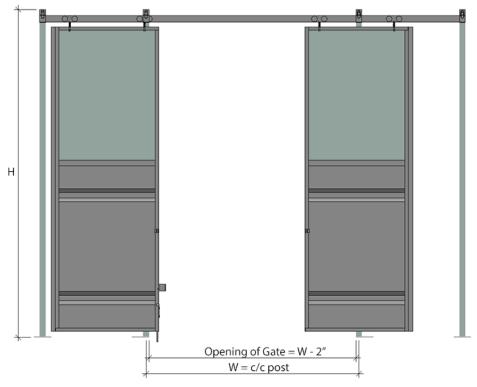

HW	4'-0"	5'-0"	6'-0"	7'-0"	8'-0"
7'-0"	/	/	/	/	/
8'-0"	/	/	/	/	/
8'-0" + 1'-0" Transom	/	/	/	/	/



—— Indicates gate dimension is **not** available.





LEXAN AND SHEET METAL

LOCK OPTIONS

Below are the standard lock options for our partition security gates. Choose between a latch and key, or keys on both sides for added security. Panic bars are not available for bi-parting sliding gate.







